

ACP-5260

5U 20-slot Rackmount Chassis with 6 Hot-swap Ultra320 SCSI SCA HDD Trays and Redundant Power Supply





Features


- Supports ATX motherboard or backplane with up to 20 slots
- Ultra320 SCA SCSI data storage unit, which meets the SAF-TE (SCSI Accessed Fault-Tolerant Enclosure) specification
- Hot-swappable SCSI HDD trays, high-speed cooling fans and redundant power supply
- System alarm notification LEDs, including system operation, system power, and SCSI storage status
- Front-accessible USB and PS/2 interfaces for easy data transfer
- Lockable front-door prevents unauthorized access

Specifications

Drive Bay	3.5"	Front-accessible	
	5.25"	6 (hot-swap), 1 (standard)	
	Slim CD-ROM	1	
Cooling	Fan	2 (47 CFM each) for SCSI storage, 3 (114 CFM each) in the middle of the chassis	
	Blower	2 (25 CFM each) on rear	
	Air Filter	Yes	
I/O Interface	USB	2 (front-accessible)	
	PS/2	PS/2 keyboard & mouse, or PS/2 keyboard only, depending on the enclosed CPU board	
Miscellaneous	Rear Panel	Two D-Sub 9-pin openings	
Environment	Temperature	Operating 0 ~ 40° C (32 ~ 104° F)	Non-Operating -20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85 % @ 40° C, non-condensing	10 ~ 95 % @ 40° C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	30 G
	Altitude	0 to 3,048 m (0 ~ 10,000 ft)	
Physical Characteristics	Dimensions (W x H x D)	482 x 222 x 660 mm (19" x 8.75" x 26")	
	Weight	30 kg (66 lb)	

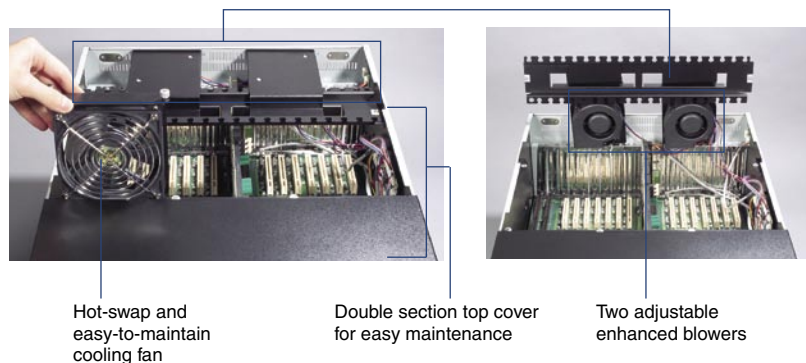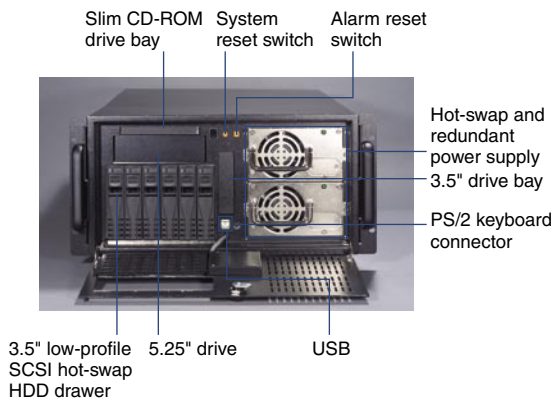

Dimensions

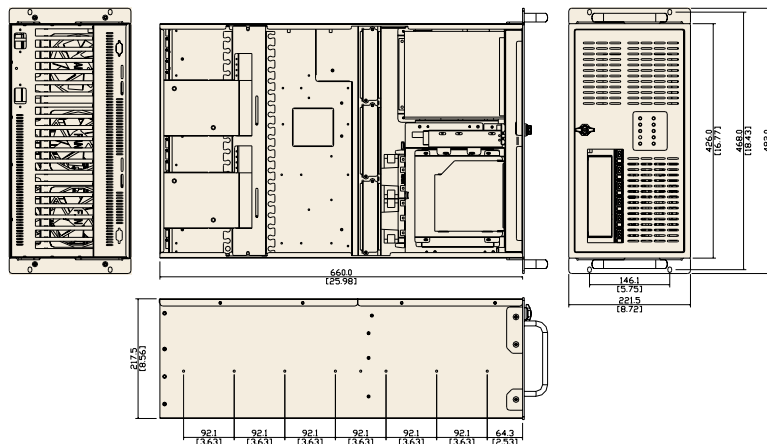

Unit: mm (inch)

Power Supply Options


Part Number	Watt	Input	Output	Specifications		
				Mini-load	Safety	MTBF
1757000197G (ATX, PFC) (B/P version)	460 W	AC 100 ~ 240 V (full-range)	+5 V @ 40 A, +3.3 V @ 30 A +12 V @ 32 A, -12 V @ 1 A -5 V @ 0.8 A, +5 Vsb @ 2 A	+5 V @ 5 A +3.3 V @ 1 A +12 V @ 2.5 A +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	100,000 hours @ 25° C
1757946006G (ATX, PFC) (M/B version)	460 W	AC 100 ~ 240 V (full-range)	+5 V @ 40 A, +3.3 V @ 30 A +12 V @ 27 A, -12 V @ 1 A -5 V @ 0.8 A, +5 Vsb @ 2 A	+5 V @ 5 A +3.3 V @ 1 A +12 V @ 2.5 A +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	100,000 hours @ 25° C
1757000127G (ATX, PFC) (2+1 redundant)	570 W	AC 115 ~ 230 V (full-range)	+5 V @ 50 A, +3.3 V @ 40 A +12 V @ 34 A, -5 V @ 1 A -12 V @ 1 A, +5 Vab @ 1.2 A	+5 V @ 6 A, 3.3 V @ 2 A +12 V @ 3 A, -5 V @ 0.1 A -12 V @ 0.1 A, 5 Vab @ 0.1 A	UL/TUV/CB/CCC	100,000 hours @ 25° C
1757000128G (ATX, PFC) (3+1 redundant)	810 W	AC 115 ~ 230 V (full-range)	+5 V @ 75 A, +3.3 V @ 60 A +12 V @ 51 A, -5 V @ 1.5 A -12 V @ 1.5 A, +5 Vab @ 1.6 A	+5 V @ 9 A, +3.3 V @ 3 A +12 V @ 4.5 A, -5 V @ 0.15 A -12 V @ 0.15 A, +5 Vab @ 0.15 A	UL/TUV/CB/CCC	100,000 hours @ 25° C

Accessories

Part Number	Description
SCD-ROME	Black slim 24X CD-ROM drive with 40-pin IDE connector
SDVD-CDRWE	Black slim 8X DVD + 24X CD-ROM drive with 40-pin IDE connector
96FDD-144-TE-B1	Black 3.5" FDD
96CD-52X-I-AS-B3	Black 5.25" 52X CD-ROM
96DVR-40X-I-AS-B	Black 5.25" 16X/40X/24X DVDRW-ROM

Ordering Information

Part Number	Power Supply	Motherboard/Backplane	Regulation
ACP-5260MB-46RE	1757946006G	-	CE
ACP-5260BP-46RE	1757000197G	-	CE
ACP-5260BP-57NE	1757000127G	-	CE
ACP-5260BP-81NE	1757000128G	-	CE

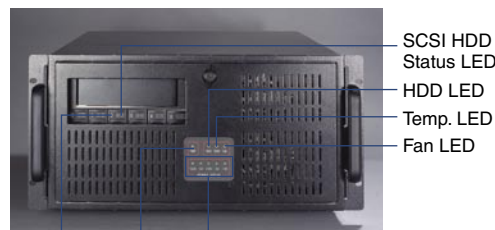

SCSI HDD Power LED
Power LED
Power status